


MOUNTING RAIL MR-01

Installed under solar panels, full length, made of extruded anodized aluminum, exterior with innovative silver and black design, can be used for universal mounting of solar panels on roof and ground. *It is not subjected to corrosion, resistant to weather changes.*

Product features

Name	Mounting rail
Material	High grade aluminum alloy, corrosion resistant Al 6005-T5
Processing method	Extruded, Anodized,
Surface flatness	0,1
Color	Natural silver
Weight	740 (g/m)
Tensile strength, yield (stretch 5 mm/min)	3,28 (kN)

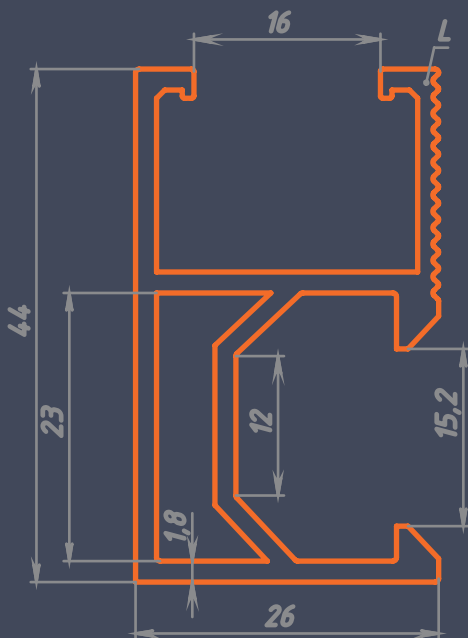

- There are no oil stains, cracks, corrosion spots, delaminations, air bubbles on the surface of profiles.
- The cross section of the product does not have bends, twists, deformations or protrusions according to the requirements of the drawing

